



Decontactor DX2 200A

Protection mode:

Type of protection: II 2GD Ex de IIC
Td A21
Classe of temperature: T6-T5
Protection degree: IP65




Technical data :

- Rated current (with wiring according to standard) 200
- IP protection lid close IP65
- IP protection connected plug IP65
- Resistance to shocks IK 10
- Umax AC 750
- Ambient Temperature -25 °C à +60 °C
- Flexible wiring (min - max) 70 mm
- Stranded wiring (min - max) 70 mm²

Other wiring on request :

- Keying positions 12
- Protection mode : de
- Zones : 1-2-21-22

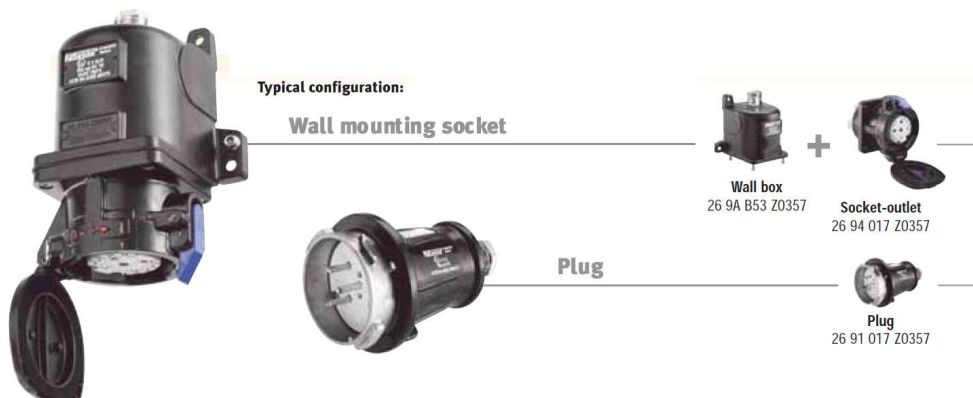

Socket-outlet (Femelle)



Voltage 50 Hz	Polarity	Part N°
380 - 440V	3P+E	26 94 013 Z0357
380 - 440V	3P+N+E	26 94 017 Z0357

Inlet (male)



Voltage 50 Hz	Polarity	Part N°
380 - 440V	3P+E	26 98 013 Z0357
380 - 440V	3P+N+E	26 98 017 Z0357

Boxes

EX cable gland included



Option:

Accessories and others products on request..

Part N°
M63 269AB53Z0357 36 – 48 mm