



Decontactor DX9 125A

Protection mode:

Type of protection: II 2GD Ex de IIC
Td A21
Classe of temperature: T6-T5
Protection degree: IP65




Spécifications techniques

- Rated current (with wiring according to standard) 125 A
- IP protection lid close IP65
- IP protection connected plug IP65
- Resistance to shocks IK 10
- Umax AC 750 V
- Ambient Temperature -25 °C à +60 °C
- Flexible wiring (min - max) 50 - 70 mm²
- Stranded wiring (min - max) 50 - 70 mm²

Other wiring on request :

- Keying positions 12
- Protection mode : de
- Zones : 1-2-21-22

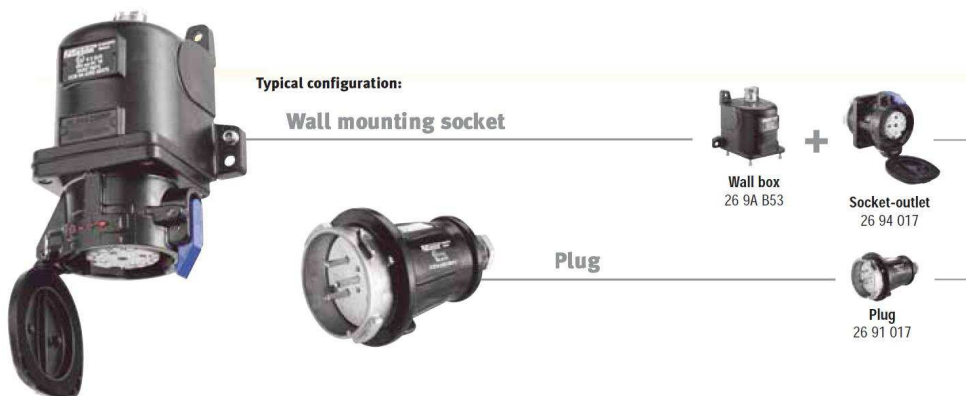

Socket-outlet (Female)



Voltage 50 Hz	Polarity	Part N°
380 - 440V	3P+E	26 94 013
380 - 440V	3P+N+E	26 94 017

Inlet (male)



Voltage 50 Hz	Polarity	Part N°
380 - 440V	3P+E	26 98 013
380 - 440V	3P+N+E	26 98 017

Boxes

Ex cable gland included



Part N°
M40 26 9A B53 16 - 27 mm

Option:

Accessories and others products on request.