



Protection mode:


Type of protection: EX II 2GD EEX em II
 Class of temperature: T4 -45°C to +50°C
 Protection degree: IP 65/ IP66 IP/67 & IP68 on request
 Zones : 1-2-21-22
 Certificate CE0518 03 ATEX 3206

Description:

The Trident VL125 fluorescent provides a new approach to emergency lighting. It features a dedicated third emergency lamp (11W compact fluorescent) housed in its own enclosure.



| Technicals data : | | | | | | | | | | | | | | | | | |
|-------------------|---|------------------|-------|-------|-------|-------------|-------|-------|-------|----------|-------|-------|-------|---------------|-------|-------|-------|
| Type | T8, Diameter 26mm, G13 Bi-pin | | | | | | | | | | | | | | | | |
| Power supply | 220V - 254V, 47/63 Hz AC/DC | | | | | | | | | | | | | | | | |
| Consumation | 2x58W - 92W to 240V -0.40A 2x36W - 62W to 240V -0.32A 2x18W - 30W to 240V -0.15A | | | | | | | | | | | | | | | | |
| Fact, Power | Up to 0.95 | | | | | | | | | | | | | | | | |
| Terminals | Up to 6mm ² , power supply, ON/OFF, neutral and ground connections following. | | | | | | | | | | | | | | | | |
| Materials | Body: Molded Polycarbonate Polycarbonate Réflecteur Stainless steel, treatment RCT+ Epoxy paint & powder trim: Silicone Screws & fixing Stainless steel | | | | | | | | | | | | | | | | |
| Weight | <table border="1"> <thead> <tr> <th>Loop in loop out</th> <th>2x58W</th> <th>2x36W</th> <th>2x18W</th> </tr> </thead> <tbody> <tr> <td>No crossing</td> <td>6,2kg</td> <td>5,4kg</td> <td>3,8kg</td> </tr> <tr> <td>Crossing</td> <td>6,8kg</td> <td>6,0kg</td> <td>4,4kg</td> </tr> <tr> <td>Pole mounting</td> <td>6,5kg</td> <td>5,7kg</td> <td>4,1kg</td> </tr> </tbody> </table> | Loop in loop out | 2x58W | 2x36W | 2x18W | No crossing | 6,2kg | 5,4kg | 3,8kg | Crossing | 6,8kg | 6,0kg | 4,4kg | Pole mounting | 6,5kg | 5,7kg | 4,1kg |
| Loop in loop out | 2x58W | 2x36W | 2x18W | | | | | | | | | | | | | | |
| No crossing | 6,2kg | 5,4kg | 3,8kg | | | | | | | | | | | | | | |
| Crossing | 6,8kg | 6,0kg | 4,4kg | | | | | | | | | | | | | | |
| Pole mounting | 6,5kg | 5,7kg | 4,1kg | | | | | | | | | | | | | | |
| Mounting | Standard mounting is direct to reflector, see mounting options for other variants | | | | | | | | | | | | | | | | |

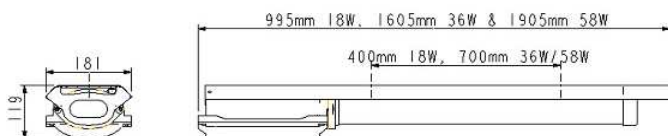

FIXING CENTRES SUITABLE FOR M8 BOLTS

