



PS*/PG Polyamide Cable gland

Protection mode:

Type of protection: II 2 GD EEx e II
 Class of temperature:
 Protection degree: IP 66 / IP 68**
 Certificate: LCIE 97 ATEX 6007X



Description:

Polyamide cable gland for non armoured cable, black colour RAL 9005 (PSA/PG), certified for increased safety equipment, or blue RAL 5012 (PSI/PG) for intrinsic safety equipment.

For non armoured cable, outer seal.

Technical data:


Materials:

Body: polyamide.
 Gasket: neoprene.

On request:

**Sealing gasket (IP 68).
 Counter nut.
 Metric thread (ISO Mx1.5).

Technical drawing:

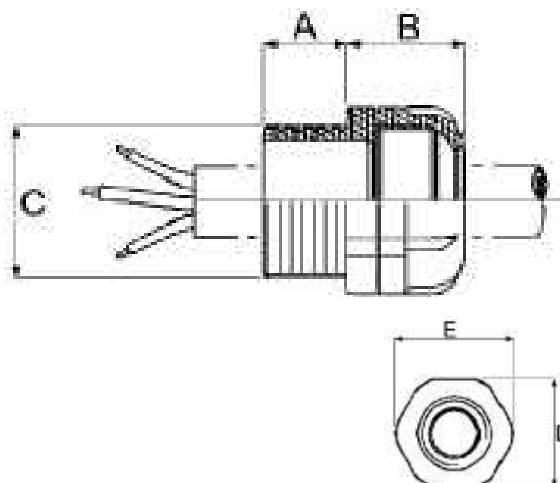

Type	Thread	Sizes (mm)					Ø Cable (mm)	
		A	B	Ø C	D	E	min.	max.
PS*/PG 07	PG 7	9	18	12.5	15	16	3.5	6
PS*/PG 09	PG 9	9	22	15.2	19	21	5	8
PS*/PG 11	PG 11	9	22	18.6	22	24	6	10
PS*/PG 13	PG 13.5	10	23	20.4	24	26	8	13
PS*/PG 16	PG 16	10	23	22.5	26	29	10	15
PS*/PG 21	PG 21	11	29	28.3	32	35	13	19
PS*/PG 29	PG 29	12	29	37.0	41	45	18	25
PS*/PG 36	PG 36	14	35	47.0	52	57	24	32
PS*/PG 42	PG 42	16	40	54.0	59	65	29	38
PS*/PG 48	PG 48	18	41	59.0	65	71	36	44

* A = For increased safety circuits – black colour RAL 9005
 I = For intrinsic safety circuits –blue colour RAL 5012